

Time: 3 Hours

Marks: 80

- N.B.** (1) Question No. 1 is compulsory.  
 (2) Attempt any **Three** questions out of remaining **five** questions.  
 (3) Assume any suitable data if necessary.  
 (4) Figure to the right indicate full marks.

**Q.1** Answers the following questions:- (**Attempt any Four**) (20)

- Draw and explain physical diagram and block diagram of basic Level control loop.
- Why pneumatic instrumentation is preferred and used in plants?
- Compare Feedback and Feed-forward control system.
- Incorporation of P-I action may lead to instability in the closed loop performance- Justify.
- Draw symbol and explain function of following elements are used in physical ladder diagram .  
 i) Relays, ii) Motor, iii) Solenoid, iv) Lights, v) Switch.

**Q.2** (a) Explain P, I, D Control Actions. Discuss their advantages, disadvantages and applications. (10)

(b) Explain Cascade and Ratio Control Schemes with suitable example. (10)

**Q.3** (a) Explain inverse response behavior of the process with example and also explain inverse response compensator. (10)

(b) For a proportional controller, the controlled variable is a process temperature with a range of 50 to 130° C and a setpoint of 73.5° C. Under nominal conditions, the set point is maintained with an output of 50%. Find the proportional offset resulting from a load change that requires a 55% output if the proportional gain is (a) 0.1 (b) 0.7 (c) 2.0 and (d) 5.0. (10)

**Q.4** (a) With suitable example explain Split Range and Adaptive Control Schemes. (10)

(b) Explain with a neat sketch the working of Pneumatic PID Controller. (10)

**Q.5 (a)** Develop the physical ladder diagram for a motor with the following: NO start button, NC stop button, thermal overload limit switch opens on high temperature, green light when running, red light for thermal overload. (10)

(b) Explain Relative Gain Array method for multivariable control system and compute RGA and recommended controller pairs of following system. (10)

$$K = \begin{bmatrix} -2 & 1.5 \\ 1.5 & 2 \end{bmatrix}$$

**Q.6 (a)** Explain the procedure for tuning PID controller using Ziegler-Nicholas method. In an application while tuning by Z-N method process begins oscillations with 30% proportional band in 11.5 minutes. Find nominal PID control settings. (10)

(b) Explain features of PID controller. (10)

Time: 3 Hours

Total Marks: 80

- N.B:** 1. Question No. 1 is Compulsory.  
2. Attempt any Three from the remaining questions.  
3. Assume suitable data wherever necessary.

- Q.1 a) Explain the term IOT. (05)  
b) Compare RS232 and EIA485. (05)  
c) With neat block diagram explain operation of basic communication system. (05)  
d) Explain CAN protocol. (05)
- Q.2 a) Compare Wi-Fi, GPRS, GPS, Zigbee. (10)  
b) Explain TCP/IP protocol in details. (10)
- Q.3 a) i) Define Modulation. Explain need of amplitude Modulation in communication system. (05)  
ii) The signal power and noise power measured at the input of amplifier are 150  $\mu$ W and 1.5  $\mu$ W respectively. If the signal power at the output 1.5 W and noise power is 40 mW. Calculate the amplifier noise factor and noise figure. (05)  
b) Explain Foundation fieldbus along with its advantages & disadvantages. (10)
- Q.4 a) Explain open control network Modbus and proprietary Control network Modbus plus? (10)  
b) Explain the architecture of HART protocol in detail. (10)
- Q.5 a) Explain OPC architecture with suitable diagram. (10)  
b) Compare PPM, PWM and PPM. (10)
- Q.6 Write short notes on: (20)  
a) RFID  
b) Repeaters, bridge and router  
c) LON device network  
d) Data Highway Plus

(3 Hours)

Total Marks: 80

**N.B: (1) Question No 1 is compulsory****(2) Attempt any three questions from the remaining five questions.****(3) Answers to the questions should be grouped and written together.****(4) Assume suitable data wherever necessary and justify it.****(5) Draw neat circuit diagram and waveforms wherever applicable.**

1. **Answer any five of the following:** (20)
  - a) Differentiate between power BJT and power MOSFET.
  - b) State true or false- Single phase Induction motors are not self-starting. Justify
  - c) Describe any six ratings of SCR.
  - d) Explain servo motors in detail.
  - e) What is an inverter? Explain its classification
  - f) Explain the power stages in Induction motor.
2. a) Explain 180 degree mode for 3 phase inverter. (10)
  - b) Explain the construction and working of shaded pole induction motor (10)
3. a) Explain the characteristics of DC shunt motor and DC series motor. (10)
  - b) Explain latching of IGBT. (10)
4. a) Explain the working of 3phase induction motor. Also explain the torque slip characteristics of the motor. (10)
  - b) Explain full controlled bridge rectifier using RL load. (10)
5. a) Explain relaxation Oscillator using UJT. (10)
  - b) A 4 pole ,3 phase induction motor operates from a supply whose frequency is 50Hz. Calculate: (05)
    - i) the speed at which the magnetic field of the stator is rotating.
    - ii) the speed of the rotor when the slip is 0.04.
    - iii) the frequency of the rotor current when the slip is 0.03.
    - iv) the frequency of the rotor current at standstill.
  - c) Determine the developed torque and the shaft torque of 220V,4 pole series motor with 800 conductors wave connected supplying a load of 8.2KW by taking 45A from the mains. The flux per pole is 25m Wb and its armature circuit resistance is 0.6 ohms. (05)
6. **Write short notes on any two of the following** (20)
  - a) Chopper and explain any one of its types
  - b) Single phase full converter Drives for DC motor
  - c) Firing circuit for TRIAC using DIAC
  - d) Stepper motor







Duration: 3 Hours

Total Marks Assigned: 80

Note:

1. Question one is compulsory.
2. Solve any three from remaining and suitable data

- Q1. Solve any four** **20**
- a. Investigate in detail Physical nonlinearity which has memory.
  - b. Demonstrate Saturation and dead-zone in detail with sinusoidal input.
  - c. Differentiate linear and nonlinear system in detail
  - d. Explain Lyapunov theorem in details
  - e. Derive classical control “c” from the IMC controller ‘q’

- Q2. a** Investigate the following system around the equilibrium point (0,0) and derive its linear model. **10**


1.  $\dot{x}_1 = -x_1^2 + x_2$   
 $\dot{x}_2 = x_1 - x_2^2$
2.  $\dot{x}_1 = -x_1 + x_2 + x_1^3 + x_1x_2^2$ ,  
 $\dot{x}_2 = -x_1 - x_2 + x_2^3 + x_1^2x_2$

- Q2. b** Design IMC- PI controller for the following plant model in order to achieve the response with time constant of 1.5 Sec. **10**
- $$G(s) = \frac{(-s + 1)}{(2s + 1)}$$

- Q3.a** Derive the Lyapunov function using Variable Gradient method for the system given , **10**
- $$\dot{x}_1 = -9x_2, \dot{x}_2 = -x_1^2 - x_2$$

- Q3.b.** Formulate the describing function for relay with dead zone **10**

- Q4.a.** Investigate Stability using Describing function of following system which has unity saturation signal as a nonlinearity and find out frequency and magnitude where system has limit cycle

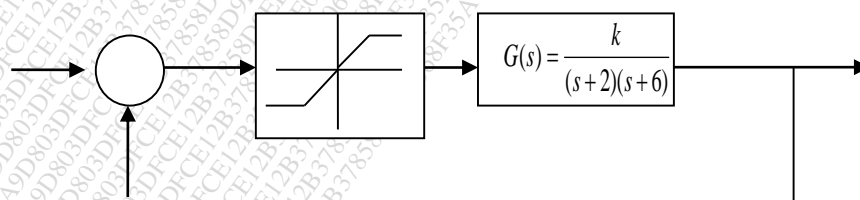

10

**Q4.b.** Investigate stability of the following nonlinear system using Lyapunov's method

$$\dot{x}_1 = -x_1 + x_2 + x_1^3 + x_1x_2^2, \dot{x}_2 = -x_1 - x_2 + x_2^3 + x_1^2x_2$$

**Q5.a.** Explain in details IMC based PID controller Design/tuning. **10**

**Q5.b.** Using different equilibrium point comment of singular point and draw trajectories **10**

1.  $\dot{x}_1 = -x_1^2 + x_2^2$

$$\dot{x}_2 = x_1^2 - x_2^2$$

2.  $\dot{x}_1 = x_2$

$$\dot{x}_2 = -x_1 + x_2(1 - x_1^2 + 0.1x_1^4)$$

**Q6a.** How would you classify the following physical nonlinearities and sketch their input-output characteristics? **04**

- a. Saturation   b. Dead-zone   c. Relay   d. Friction

**Q6b** Explain in details Jump resonance for nonlinear system **06**

**Q6c** What is limit cycle? Explain in details contrast between stable and unstable limit cycles using Van der Pol equation **10**



Duration: 03 Hours.

Total marks: 80

Instructions to the candidates if any:-

- N. B.** (1) Question No. 1 is compulsory.  
 (2) Answer any **Three** out of remaining questions.  
 (3) Assumptions made should be **clearly** stated.

**Q. 1)** Answer the following (**Any Four**)

**20**

- a) Explain natural and artificial radioactivity
- b) Explain Half Life Time with suitable example
- c) Define Thyroidism (Hyper and Hypo)
- d) Explain Isotopes and Isobars with suitable example
- e) What are the different laws of Radioactivity?

**Q. 2)** a) Explain Photoelectric effect and pair production process

**10**

b) Explain Compton Effect in detail

**10**

**Q. 3)** a) Explain Gamma camera with suitable block diagram

**10**

b) Explain Radiation Uptake studies with suitable block diagram

**10**

**Q.4)** a) Explain the Nuclear Instrumentation for power reactor

**10**

b) Explain need of Quenching in GM counter

**10**

**Q.5)** a) Explain working of Pulse Height Analyzer

**10**

b) Explain working of Multi-channel Analyzer

**10**

**Q.6)** Write a note on

a) Units of Radioactivity

**10**

b) Nuclear Medicine

**10**

\*\*\*\*\*

69576